
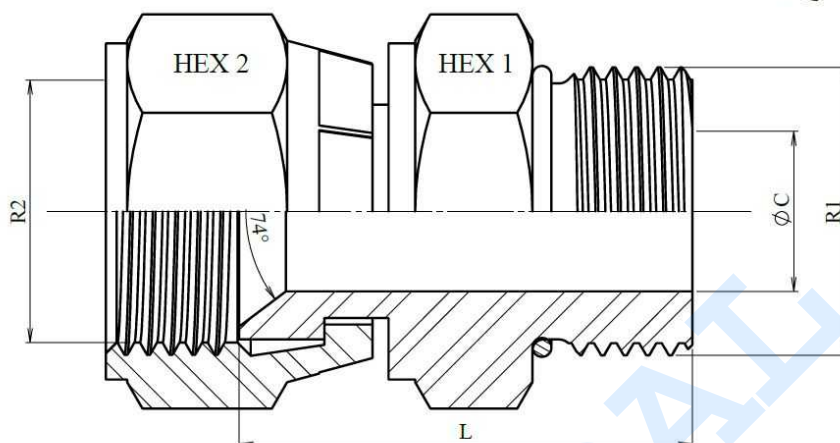


Adaptadores O'Ring Boss

Uniones rectas macho-hembra

## Adaptador macho O'Ring Boss - hembra giratoria JIC 37º

Acero Inoxidable AISI 316-L

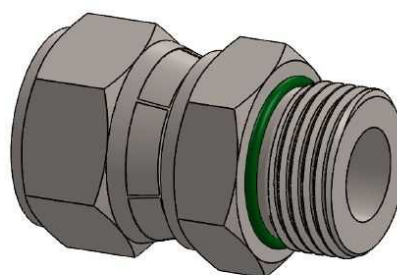

Artículo	ØD1	ØD2	R1	R2	L	HEX 1	HEX 2	ØC
<b>ZS38006</b>	6	1/4"	7/16" 20h UNF	7/16" 20h UNF	26,5	14	14	4,4
<b>ZS38010</b>	10	3/8"	9/16" 18h UNF	9/16" 18h UNF	30	17	19	6
<b>ZS38012</b>	12	1/2"	3/4" 16h UNF	3/4" 16h UNF	33	22	24	9,5
<b>ZS38016</b>	14-15-16	5/8"	7/8" 14h UNF	7/8" 14h UNF	36,5	27	27	12
<b>ZS38020</b>	18-20	3/4"	1"1/16 12h UN	1"1/16 12h UN	42,5	32	32	15
<b>ZS38025</b>	25	1"	1"5/16 12h UN	1"5/16 12h UN	44	41	41	22