


Racores baja presión 150 LBS

150 LBS Microfundido

**Adaptador hexagonal FIG.280**

Acero Inoxidable AISI 316

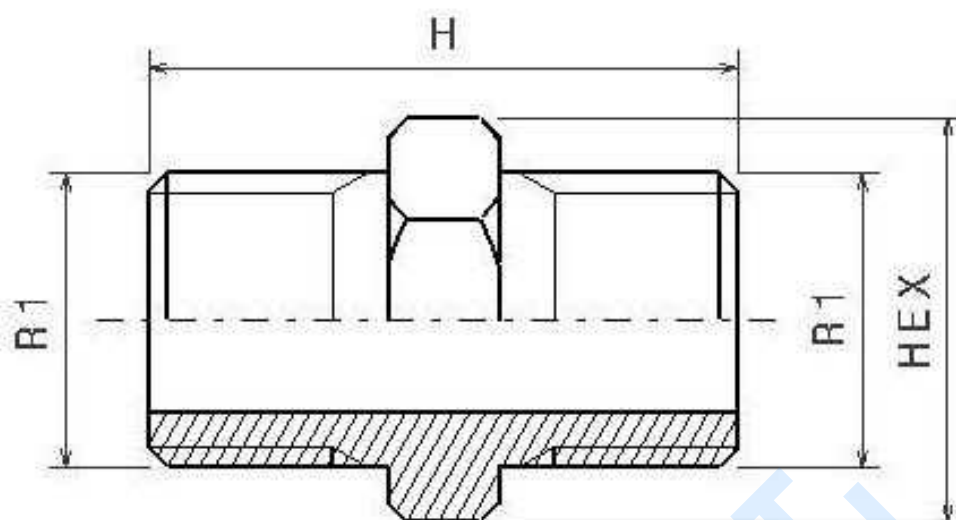

**Normas:** Roscas machos de acuerdo a EN10226-1  
Roscas hembras de acuerdo a ISO 228-1

**Cara:** 1/8" => 3/4" Hexagonal; 1" => 4" Octogonal

**PN:** 1/2" - 2": 17,6 Bar --- 2 1/2" - 3": 14 Bar --- 4" - 6": 7 Bar

Artículo	R1	HEX 1	H
ZFIG28004	1/4"	14,5	24
ZFIG28006	3/8"	17,5	28,7
ZFIG28008	1/2"	22,6	37
ZFIG28012	3/4"	27,7	41
ZFIG28016	1"	36	45,4
ZFIG28020	1"1/4	43,5	50
ZFIG28024	1"1/2	50	53,3
ZFIG28032	2"	63	61
ZFIG28040	2"1/2	77,5	72
ZFIG28048	3"	91,5	77
ZFIG28060	4"	116	83

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.