


Racores baja presión 150 LBS

150 LBS Microfundido

Codo 90° hembra-hembra FIG.090

Acero Inoxidable AISI 316

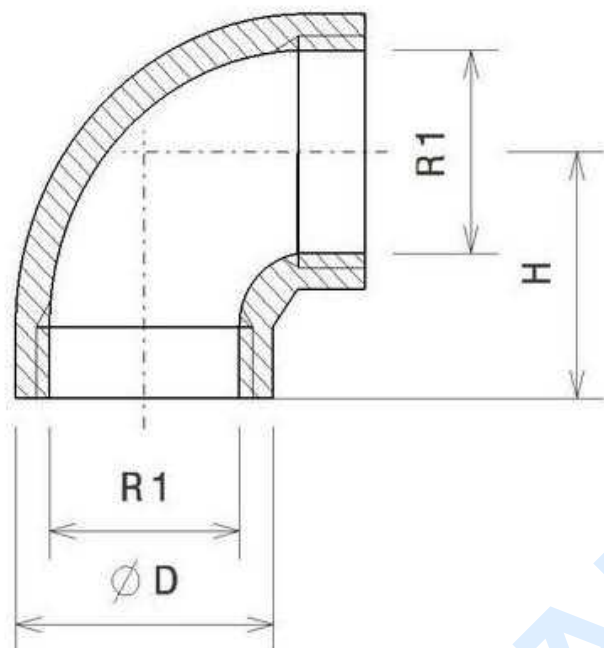

Normas: Roscas machos de acuerdo a EN10226-1
Roscas hembras de acuerdo a ISO 228-1

PN: 1/2" - 2": 17,6 Bar --- 2 1/2"- 3": 14 Bar --- 4"- 6": 7 Bar

Artículo	R1	ØD	H
ZFIG09002	1/8"	14	16
ZFIG09004	1/4"	16,5	18
ZFIG09006	3/8"	20	21
ZFIG09008	1/2"	26	25
ZFIG09012	3/4"	32	30
ZFIG09016	1"	39,2	34
ZFIG09020	1"1/4	47,2	40
ZFIG09024	1"1/2	54,5	43,5
ZFIG09032	2"	67	53,5
ZFIG09040	2"1/2	85	63,5
ZFIG09048	3"	97,5	74
ZFIG09060	4"	124,5	89

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.