


Racores baja presión 150 LBS

150 LBS Microfundido

Cruz roscada FIG.180



Acero Inoxidable AISI 316

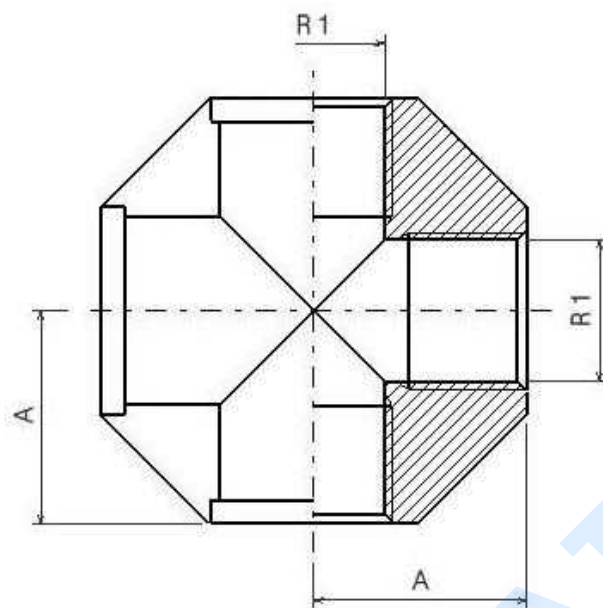

Normas: Roscas machos de acuerdo a EN10226-1
Roscas hembras de acuerdo a ISO 228-1

PN: 1/8"-3/8": 16Bar---1/2" - 2": 17,6 Bar --- 2 1/2"- 3": 14 Bar --- 4"- 6": 7 Bar

Artículo	R1	A
ZFIG18002	1/8"	16
ZFIG18004	1/4"	18
ZFIG18006	3/8"	21
ZFIG18008	1/2"	25
ZFIG18012	3/4"	30
ZFIG18016	1"	34
ZFIG18020	1"1/4	40
ZFIG18024	1"1/2	44
ZFIG18032	2"	53,5
ZFIG18040	2"1/2	64
ZFIG18048	3"	74
ZFIG18060	4"	89

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.