


Llaves de paso AISI 316

Llaves de paso

Llave 2 vías rosca hembra BSP



Acero Inoxidable AISI 316

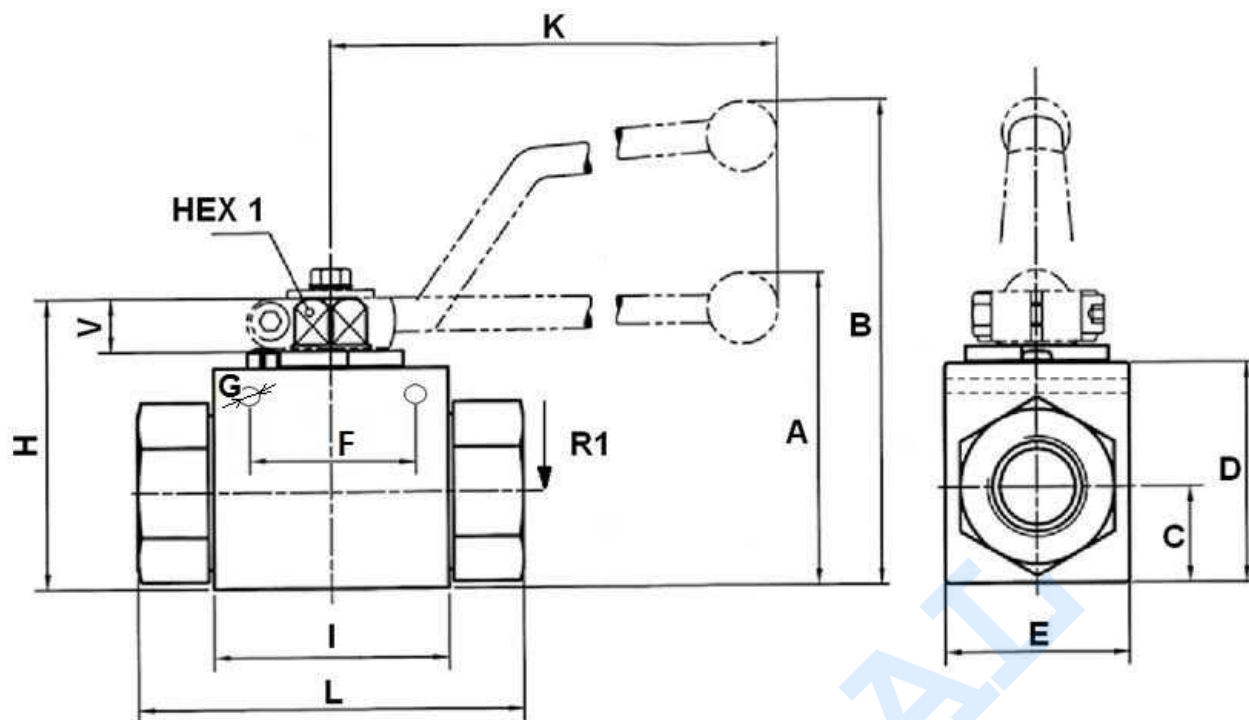

Tmin/Tmax: -20°C/+100°C

Juntas estándar: NBR

Asiento bola: POM
(polioximetileno)

Palanca: Zn

MKH G 1/8 G: 5.1mm F:31mm

Artículo	DN	R1	PRESIÓN MAX. (bar)	HEX 1	A	B	C	D	E	H	I	K	L	V
MKH G 1/8	4	1/8" BSP	500	9	-	82	13,5	33	26	47	40	115	69	11
MKH G 1/4	6	1/4" BSP	500	9	-	82	13,5	33	26	47	40	115	69	11
MKH G 3/8	10	3/8" BSP	500	9	-	86	17,5	38	32	52	43	115	72	11
MKH G 1/2	13	1/2" BSP	500	9	-	89	19	40	35	54	48	115	83	11
MKH G 5/8	16	5/8" BSP	500	12	-	106	19	46	38	63	48	160	83	13
MKH G 3/4	20	3/4" BSP	315	14	79	-	24,5	57	49	75	62	200	95	14
MKH G 1	25	1" BSP	315	14	87	-	29,5	65	58	83	66	200	113	14
MKH G 1 1/4 DN25	25	1" 1/4 BSP	315	14	87	-	29,5	65	58	83	66	200	120	14
MKH G 1 1/2 DN25	25	1" 1/2 BSP	315	14	87	-	29,5	65	58	83	66	200	130	14