


Racores baja presión 150 LBS

150 LBS Microfundido

Reducción hembra-hembra FIG.240



Acero Inoxidable AISI 316

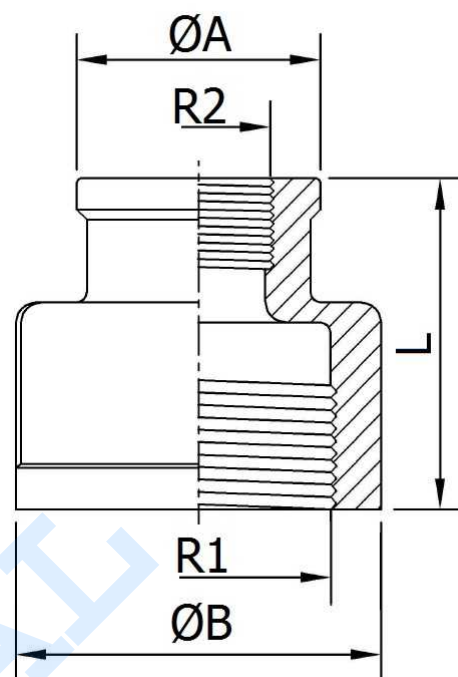

Normas: Roscas machos de acuerdo a EN10226-1
Roscas hembras de acuerdo a ISO 228-1

PN: 1/2" - 2": 17,6 Bar --- 2 1/2"- 3": 14 Bar --- 4"- 6": 7 Bar

Artículo	R1	R2	L	ØA	ØB
ZFIG2400402	1/4"	1/8"	21,1	14	17,1
ZFIG2400604	3/8"	1/4"	28,1	14	22
ZFIG2400806	1/2"	3/8"	31,7	21	26,7
ZFIG2401208	3/4"	1/2"	36,6	27	32,1
ZFIG2401612	1"	3/4"	40	32	39,5
ZFIG2402016	1"1/4	1"	43,2	39	48,9
ZFIG2402420	1"1/2	1"1/4	46	48,5	55,3
ZFIG2403224	2"	1"1/2	51,5	55,5	69
ZFIG2404032	2"1/2	2"	58,3	65,75	83
ZFIG2404832	3"	2"	60	66	95,5
ZFIG2404840	3"	2"1/2	72	82,2	95,5
ZFIG2406032	4"	2"	68	68,4	123,5

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.