


Racores baja presión 150 LBS

150 LBS Microfundido

Reducción macho-macho FIG.245

Acero Inoxidable AISI 316

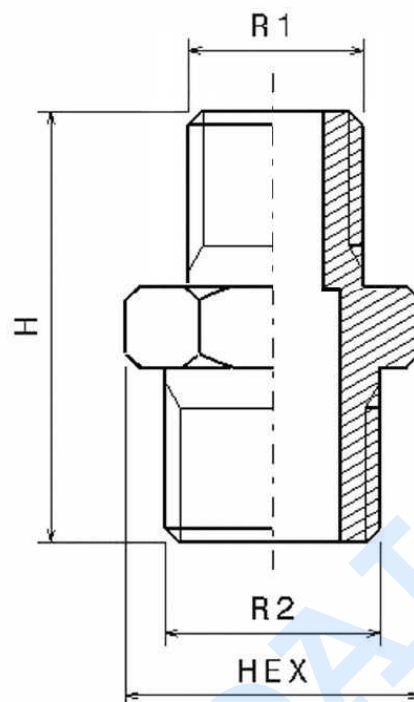

Normas: Roscas machos de acuerdo a EN10226-1
Roscas hembras de acuerdo a ISO 228-1

PN: 1/2" - 2": 17,6 Bar --- 2 1/2"- 3": 14 Bar --- 4"- 6": 7 Bar

Artículo	R1	R2	HEX 1	H
ZFIG2450402	1/4"	1/8"	15	27
ZFIG2450604	3/8"	1/4"	18	30
ZFIG2450804	1/2"	1/4"	22	32
ZFIG2450806	1/2"	3/8"	22	35
ZFIG2451206	3/4"	3/8"	29	36
ZFIG2451208	3/4"	1/2"	29	38
ZFIG2451608	1"	1/2"	35	40
ZFIG2451612	1"	3/4"	35	42
ZFIG2452012	1" 1/4	3/4"	45	45
ZFIG2452016	1" 1/4	1"	45	47
ZFIG2452416	1" 1/2	1"	50	50
ZFIG2452420	1"1/2	1" 1/4	50	51
ZFIG2453220	2"	1" 1/4	63	57
ZFIG2453224	2"	1" 1/2	63	57
ZFIG2454032	2" 1/2	2"	78	66
ZFIG2454840	3"	2" 1/2	90	70

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.