


Racores baja presión 150 LBS

150 LBS Microfundido

Reductor macho-hembra FIG.241

Acero Inoxidable AISI 316

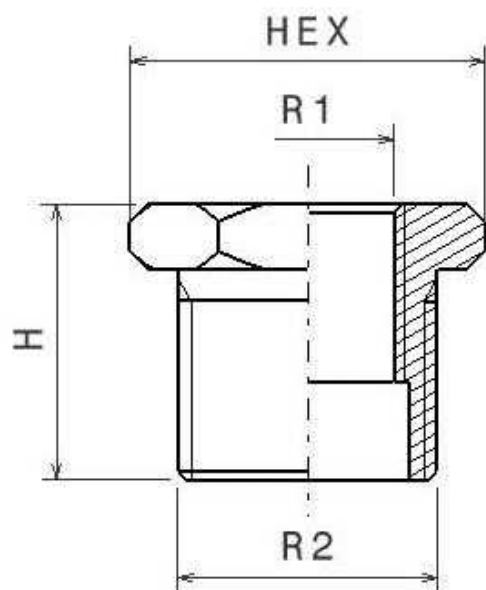

Normas: Roscas machos de acuerdo a EN10226-1
Roscas hembras de acuerdo a ISO 228-1

PN: 1/2" - 2": 17,6 Bar --- 2 1/2"- 3": 14 Bar --- 4"- 6": 7 Bar

Artículo	R1	R2	HEX 1	H
ZFIG2410204	1/8"	1/4"	15	18,6
ZFIG2410406	1/4"	3/8"	15	19
ZFIG2410408	1/4"	1/2"	22	19,5
ZFIG2410608	3/8"	1/2"	22	19,5
ZFIG2410812	1/2"	3/4"	30	23
ZFIG2411216	3/4"	1"	35	26
ZFIG2411220	3/4"	1"1/4"	35	29
ZFIG2411620	1"	1"1/4"	45	29
ZFIG2411624	1"	1" 1/2"	50	30
ZFIG2412024	1"1/4"	1"1/2"	50	30
ZFIG2412432	1"1/2"	2"	62	35
ZFIG2413240	2"	2"1/2"	79	39
ZFIG2414048	2"1/2"	3"	93	42
ZFIG2414860	3"	4"	115	48

Las dimensiones en piezas de microfundido son aproximadas en los elementos sin mecanizar.