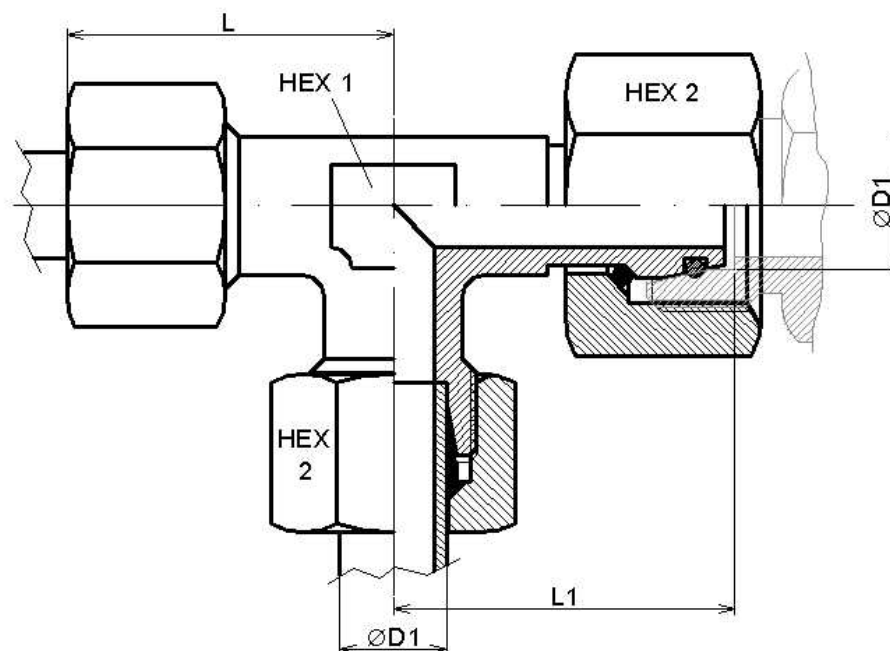


Racores DIN 2353

Racores regulables

**Racor en L regulable TL Métrica****FLUIDAL**

Acero Inoxidable AISI 316-L

**1/1**

Artículo	ØD1	Serie	R1	Presión de trabajo (bar)	L	L1	HEX 1	HEX 2
<b>Z LEL 6 TLM</b>	6	L	M12X1.5	315	27	26	12	14
<b>Z LEL 8 TLM</b>	8	L	M14X1.5	315	29	27,5	12	17
<b>Z LEL 10 TLM</b>	10	L	M16X1.5	315	30	29	14	19
<b>Z LEL 12 TLM</b>	12	L	M18X1.5	315	32	29,5	17	22
<b>Z LEL 15 TLM</b>	15	L	M22X1.5	315	36	32,5	19	27
<b>Z LEL 18 TLM</b>	18	L	M26X1.5	315	40	35,5	24	32
<b>Z LEL 22 TLM</b>	22	L	M30X2	160	44	38,5	27	36
<b>Z LEL 28 TLM</b>	28	L	M36X2	160	47	41,5	36	41
<b>Z LEL 35 TLM</b>	35	L	M45X2	160	56	51	41	50
<b>Z LEL 42 TLM</b>	42	L	M52X2	160	63	56	50	60
<b>Z LES 6 TLM</b>	6	S	M14X1.5	630	31	27	12	17
<b>Z LES 8 TLM</b>	8	S	M16X1.5	630	32	27,5	14	19
<b>Z LES 10 TLM</b>	10	S	M18X1.5	630	34	30	17	22
<b>Z LES 12 TLM</b>	12	S	M20X1.5	630	38	31	17	24
<b>Z LES 14 TLM</b>	14	S	M22X1.5	630	40	35	19	27
<b>Z LES 16 TLM</b>	16	S	M24X1.5	400	43	36,5	24	30
<b>Z LES 20 TLM</b>	20	S	M30X2	400	48	44,5	27	36
<b>Z LES 25 TLM</b>	25	S	M36X2	400	54	50	36	46
<b>Z LES 30 TLM</b>	30	S	M42X2	400	62	55,5	41	50
<b>Z LES 38 TLM</b>	38	S	M52X2	315	72	63	50	60